


145 SERIES POLYETHYLENE TAPE

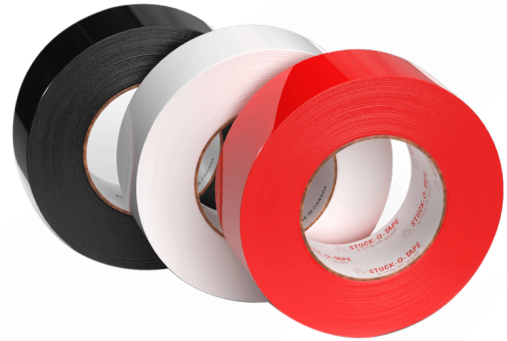

APPLICATIONS

- For stucco and plaster masking applications.
- For outdoor masking.
- Sunlight (UV) exposure applications.
- For outdoor applications where the tape is required to perform over an extended period of time up to 30 days but will offer easy, residue-free removal.

FEATURES & BENEFITS

- Specially designed adhesive virtually eliminates residue even after extended exposure.
- High quality adhesive holds even on rough surfaces. Very confirmable.
- Easy unwind
- Film & adhesive construction allow for cold weather performance – much better than standard duct tapes
- Flame Retardant

PRODUCT DESCRIPTION

- Single Coated Construction
- Backing – Durable low density Polyethylene Film
- Adhesive – Rubber based adhesive

PHYSICAL PROPERTIES

Color	Red, White (serrated), Black
Total Thickness	7.0 mil
Tensile Strength	20 lbs/in
Elongation	90%
Adhesion to Backing	35 oz/in
Adhesion to Steel	60 oz/in
Adhesive Thickness	2.5 mil
Application Temperature Range	55°F to 100°F
Service Temperature Range	25°F to 160°F



E84 Flame Tested

The physical and performance characteristics shown are averages obtained from tests recommended by ASTM, government agencies or our own procedures. A particular roll may vary slightly from these averages and it is recommended that the purchaser determine the suitability for his own purpose.