


Heavy Duty Foil/Butyl Tape

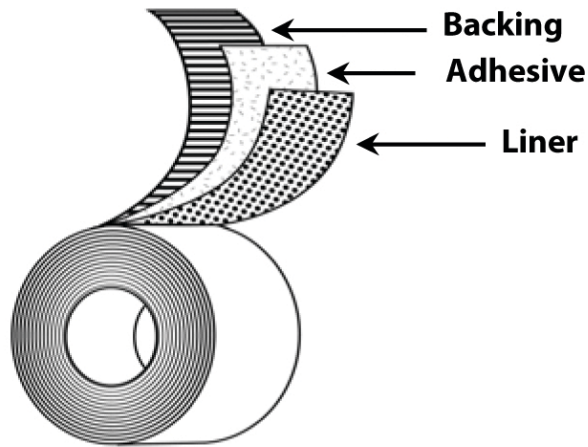

Backing: 2 mil Aluminum Foil

Adhesive: Butyl Rubber

Liner: White LDPE

Colors: Aluminum

Specifications: Tested in accordance with UL 723

Standard Sizes: 48mm x 15M, 3" x 50Ft, 4" x 50Ft

Applications

- Duct joint sealing for low, medium, and high pressure HVAC systems
- Window and door flashing
- Repairs in aluminum siding, sheet metal, gutters, storage buildings, flashing, containers, and more
- Sealing roof alleys, eaves, hips and ridges

Features

- Aggressive butyl mastic adhesive
- Conformable foil backing
- Low VOC Content

Benefits

- Provides instant water and air-tight seal
- Resistant to moisture and solvents
- Permanent repairs
- Easy to use in tight spaces. Conforms easily to round, square or odd-shaped objects
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	35 mils	889 mic	ASTM D-1000
Foil Thickness	2.0 mils	50.8 mic	ASTM D-1000
Adhesion to Steel	160 oz/in	3.61 N/cm	PSTC-101
Tensile Strength	20 lb/in	35.03 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
Standard Shelf Life (at 25C): 24 months from date of manufacture.