

Surface Protection

- Masking
- Polyethylene
- Stucco
- Surface Protection Products



MASKING

Our line of masking tapes are produced with crepe paper backings, to provide stretch and conformability, and quality adhesives for a broad range of applications. Each tape has key characteristics that provide the performance required for the specific job. Utility masking tape provides an economical way to bundle, mask, splice, and mark-off in non-critical applications. Industrial grade tape offers improved temperature and solvent resistance for more involved masking requirements. UV Resistant masking tapes can be used in a wide range of painting, masking and industrial applications. The adhesive systems provide great adhesion to delicate as well as solid surfaces and clean lines for painting while leaving no residue behind.



250 - General Purpose Grade Natural Rubber Adhesive

- General purpose tape offering both economy and versatility.
- Rated service temperature 32°F to 160°F (Not suitable for solvent based paints or oven bake cycles)
- Tape Thickness: 5.0 mil Adhesion: 28 oz/in
Tensile Strength: 19 lb/in Elongation: 6%

254 - Industrial Grade Natural Rubber Adhesive

- Mid grade performance suitable for use in masking applications where moderate heat is applied.
- Rated service temperature 0°F to 203°F
- Tape Thickness: 5.6 mil Adhesion: 32 oz/in
Tensile Strength: 20 lb/in Elongation: 10%

Series	Product Code	Size	Units/Case	Pack	Features
250	25001	1/2" (12 mm) x 60 yd	72 / case	accordion wrap / sleeved	Used for a range of packaging, bundling, holding, splicing, masking and labeling applications.
	25002	3/4" (18 mm) x 60 yd	48 / case	accordion wrap / sleeved	
	25004	1" (24 mm) x 60 yd	36 / case	accordion wrap / sleeved	
	25006	1 1/2" (36 mm) x 60 yd	24 / case	accordion wrap / sleeved	
	25008	2" (48 mm) x 60 yd	24 / case	accordion wrap / sleeved	
	25009	3" (72 mm) x 60 yd	12 / case	accordion wrap / sleeved	
	25012	4" (96 mm) x 60 yd	12 / case	accordion wrap / sleeved	
	R25012	3/4" (18 mm) x 60 yd	48 / case	cello / label	
	R25014	1" (24 mm) x 60 yd	36 / case	cello / label	
	R25016	1 1/2" (36 mm) x 60 yd	24 / case	cello / label	
	R25018	2" (48 mm) x 60 yd	24 / case	cello / label	
	254	254N05	1/2" (12 mm) x 60 yd	72 / case	
254N07		3/4" (18 mm) x 60 yd	48 / case	accordion wrap / sleeved	
254N10		1" (24 mm) x 60 yd	36 / case	accordion wrap / sleeved	
254N15		1 1/2" (36 mm) x 60 yd	24 / case	accordion wrap / sleeved	
254N20		2" (48 mm) x 60 yd	24 / case	accordion wrap / sleeved	
254N30		3" (72mm) x 60 yd	12 / case	accordion wrap / sleeved	



108 14 Day Blue Clean Removal Painters Grade

- UV resistant product with a specially formulated adhesive system permits clean removal from a wide variety of surfaces up to 14 days.
- Highly versatile product suitable for use on glass, most wallpaper, metal, painted or unpainted wood, and stained or painted wallboard.
- Not recommended for lacquer applications.
- Tape Thickness: 5.2 mil Adhesion: 22 oz/in
Tensile Strength: 28 lb/in Elongation: 10%

275 7 Day Green Clean Removal Painters Grade

- Special adhesive system permits clean removal from a wide variety of surfaces for up to 7 days.
- UV and solvent resistant to prevent bleed through in painting applications that don't require elevated temperatures.
- Not recommended for lacquer applications.
- Tape Thickness: 5.0 mil Adhesion: 18 oz/in
Tensile Strength: 26 lb/in Elongation: 10%



Series	Product Code	Size	Units/Case	Pack	Features
108 ✂	25542	3/4" (18 mm) x 60 yd	64 / case	cello	Excellent tape for even the most demanding paint applications. Hold up poly on walls; hold down floor covers, etc.
	25544	1" (24 mm) x 60 yd	48 / case	cello	
	25546	1 1/2" (36 mm) x 60 yd	32 / case	cello	
	25548	2" (48 mm) x 60 yd	24 / case	cello	
	25549	3" (72 mm) x 60 yd	16 / case	bulk	
	255484	4" (96 mm) x 60 yd	12 / case	bulk	
	L2556160AB	61" (1549 mm) x 60 yd	6 / case	log	
275	27520	2" (48 mm) x 60 yd	24 / case	cello	Special adhesive system permits clean removal from a wide variety of surfaces for up to 7 days.

VINYL & POLYETHYLENE




133 - General Purpose Polyethylene Tape

- Low residue yet aggressive adhesive allows for use in surface protection applications.
- No UV additives so not recommended for long term outdoor use.
- Suitable for general purpose permanent patching, splicing, masking, and seaming.
- Standard color: red.
- Tape Thickness: 7.5 mil Adhesion: 60 oz/in Tensile Strength: 24 lb/in Elongation: 70%



135 - Polyethylene Tape Rubber Adhesive

- Serrated edges for easy, hand tearability.
- Moisture & chemical resistant. NOT UV resistant.
- Suitable for general purpose permanent patching, splicing, masking, and seaming.
- Standard color: clear.
- Tape Thickness: 7.0 mil Adhesion: 60 oz/in Tensile Strength: 18 lb/in Elongation: 80%

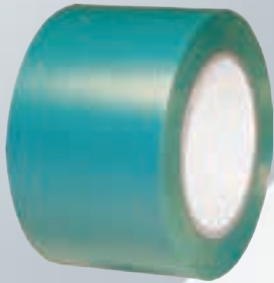

150T - PVC Protective Threshold Tape - Rubber Adhesive

- Its high durability makes this tape a great choice for protection of doorway thresholds and other surfaces where heavy traffic is involved.
- Easily conforms to irregular surfaces including metal, masonry, wood, vinyl, aluminum and more.
- Easy to use / easy to remove – leaves no messy residue.
- Moisture, chemical and UV resistant.
- Standard color: light blue.
- Tape Thickness: 7.0 mil Adhesion: 17 oz/in Tensile Strength: 11 lb/in Elongation: >300%



705 - Polyethylene Tape - Acrylic Adhesive

- Acrylic adhesive provides performance in broad range of temperatures as well as excellent aging characteristics.
- Tape provides permanent bond – not designed for temporary protection requirements.
- Standard color: clear.
- Tape Thickness: 5.0 mil Adhesion: 35 oz/in Tensile Strength: 11 lb/in Elongation: > 300%

Series	Product Code	Size	Units/Case	Pack	Features
133	144133 red	2" (48 mm) x 60 yd	24 / case	cello	Non-UV but suitable for wide range of seaming / patching / splicing applications. Serrated edge available special order.
	144203 white	2" (48 mm) x 60 yd	24 / case	cello	
135	145236	2" (48 mm) x 36 yd	24 / case	bulk	Heavy duty aggressive adhesive on a conformable PE film.
150T	159010	1" (25 mm) x 36 yd	48 / case	cello	Excellent for masking and protection when conventional masking tape is not enough.
	159020	2" (50 mm) x 36 yd	24 / case	cello	
	159030	3" (75 mm) x 36 yd	16 / case	cello	
	159040	4" (100 mm) x 36 yd	12 / case	cello	
	159060	6" (150 mm) x 36 yd	8 / case	cello	
	159120	12" (300 mm) x 36 yd	4 / case	cello	
705	70520	2" (48 mm) x 36 yd	24 / case	bulk	UV resistant. Great for splicing / patching of films in applications involving outdoor exposure i.e. agriculture.

Film "Poly" tapes are a versatile alternative to traditional duct tapes. They can be used in permanent as well as temporary protective applications. Two unique film constructions, low density polyethylene (LDPE) and vinyl (PVC), provide excellent flexibility, conformability and stretch. These backings are resistant to wear (masking), moisture (barrier seams), chemicals, and aging (UV exposure). The adhesive systems, both rubber and acrylic, are specially formulated to provide superior adhesion and hold even in applications where surfaces are textured or dust and dirt adds a challenge. This blend of properties make poly tapes a premium choice for construction and outdoor environments.


145VT Vapor Barrier Poly Seam Tape Rubber Adhesive

- Resists outdoor exposure, moisture, chemicals and weathering. Suitable for floor underlay splicing.
- Red color provides high visibility to ensure seam splice has been completed. White also available.
- Tape Thickness: 7.0 mil
Adhesion: 60 oz/in
Tensile Strength: 20 lb/in
Elongation: 90%



706B - Polyethylene Bond Breaker Tape - Acrylic Adhesive

- High tack acrylic adhesive, conformable film and high release backside combine to make a tape suitable for "Bond-Breaker" requirement for newly poured concrete when making expansion joints.
- Tape is placed in void cut into newly cured concrete. Material used to fill void does not stick to tape backside allowing for tension release and eliminating cracks.
- Narrow widths are standard.
- Standard color: black
- Tape Thickness: 5.5 mil Adhesion: 56 oz/in
Tensile Strength: 11 lb/in Elongation: 400%

Series	Product Code	Size	Units/Case	Pack	Features
145VT ✂	COLORS: red(2) and white(3)				The low permeability rating for this tape prevents moisture and vapor flow making this an excellent splice tape for heavy duty films for floor underlay. MVTR rating: 0.20 perms. 
	14530_	3" (72mm) x 60 yd	16 / case	bulk	
	14540_	4" (96 mm) x 60 yd	12 / case	bulk	
	14560_	6" (144 mm) x 60 yd	8 / case	bulk	
706B ✂	706B02	1/4" (6.3 mm) x 36 yd	96 / case	bulk	In wider widths, this tape allows for use in higher demand splicing, patching and seaming applications.
	706B03	3/8" (9.5 mm) x 36 yd	64 / case	bulk	
	706B05	1/2" (12.7 mm) x 36 yd	48 / case	bulk	
	706B06	5/8" (15.8 mm) x 36 yd	38 / case	bulk	
	706B07	3/4" (19.0 mm) x 36 yd	32 / case	bulk	
	706B08	7/8" (22.2 mm) x 36 yd	28 / case	bulk	
	706B10	1" (25.4 mm) x 36 yd	24 / case	bulk	



Stucco/EIFS masking applications are usually accomplished with a tape constructed of a UV resistant film and adhesive system. These tapes are often applied directly to window and door frames and sometimes used in conjunction with short term window films (our 589) for added masking protection. Stucco tapes come in different film and adhesive constructions to allow for variety in price and performance options.



145 - Stucco / Trim Protection Mask 30-Day

Stuck-O-Tape™ is the brand of choice for stucco professionals. It is a conformable low density polyethylene film, coated with an aggressive rubber-resin adhesive offering excellent aging characteristics – weather and UV resistant. Ideal for indoor or outdoor use as a surface protection and masking tape. Removes easily from surfaces as varied as masonry, wood, vinyl, painted metal and glass even after prolonged periods up to 30 days. Primarily used to mask window and door frames during stucco application to protect from overspray.

- All products are hand tearable. White product is standard with serrated edges.
- Tape Thickness: 7.0 mil Adhesion: 60 oz/in
Tensile Strength: 20 lb/in Elongation: 90%

Product Code	Size	Units/Case	Pack
145202 Red	2" (48 mm) x 60 yd	24 / case	bulk
145BS209 Black	2" (48 mm) x 60 yd	24 / case	bulk
145WS203 White	2" (48 mm) x 60 yd	24 / case	bulk

148W - Premium Trim Protection Mask

This product is designed for the most demanding surface protection and trim applications. Rated up to 180 days for clean removable on most solid surfaces. Tape constructed with a conformable film and premium rubber adhesive which adheres well to range of low energy surfaces (LSE) to ensure adequate hold through life of project. UV, moisture, chemical, and age resistant.

- White in color.
- Tape Thickness: 5.5 mil Adhesion: 25 oz/in
Tensile Strength: 11 lb/in Elongation: 400%



Product Code	Size	Units/Case	Pack
148W503R20 ✂	2" (48mm) x 36 yd	24 / case	bulk

WINDOW PROTECTION FILMS

Surface Protection products are used for temporary protection on numerous surfaces for a wide range of applications. They are used to shield against environmental contaminants such as dirt, dust, and moisture as well as more direct damage due to overspray of construction materials, scratches and foot traffic. These products are constructed with films (PVC and PE) for moisture resistance, flatback paper for flexibility and finished fiberstock for heavy duty requirements. Surface protection products typically carry low to moderate tack adhesives to ensure no residue upon removal. Some products are non-adhesive coated for added flexibility and worry-free use.




365 Day UV – PVC Surface Protection Film

BlueGuard's™ plasticized PVC film is specifically designed to provide residue free surface protection under the most demanding applications. The specially formulated acrylic adhesive system offers extended UV resistance for up to one full year. Blue abrasion and puncture resistant film is transparent and permits light transmission as well as final inspection. A premium all-purpose product with "No Substitutes".

Ideal for window protection for masking from overspray during building construction using stucco, EIFS, paint, concrete and mortar. The PVC film also provides surface protection for applications including fabricating, shipping and outdoor storage of polished, painted and mill finished metals, as well as smooth and textured plastics.

- Tape Thickness: 3.0 mil Adhesion: 5.5 oz/in
- Tensile Strength: 14 lb/in Elongation: 290%

Product Code	Size	Units/Case
BlueGuard ✂		
586324	24" (609 mm) x 330 ft	1 / case
586336	36" (914 mm) x 330 ft	1 / case
586348	48" (1219 mm) x 330 ft	1 / case
586612	12" (304 mm) x 660 ft	2 / case
586624	24" (609 mm) x 660 ft	1 / case
21" & 24" Window Film Applicator		
90100	21" & 24" Adjustable	1 / case

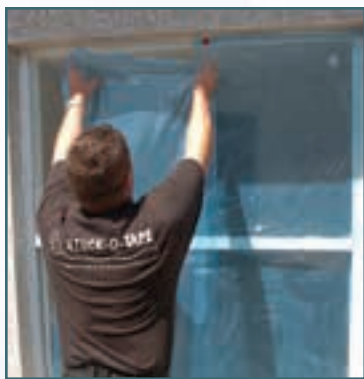

589 – Value Film – 90 Day UV – PE Surface Protection Film

A high clarity, transparent polyethylene film coated with a weather resistant acrylic adhesive. The film exhibits superior puncture resistance for prevention of scratches and damage to surfaces in transit and on the job-site. Specifically designed for indoor and outdoor protection of windows, aluminum and other non-porous surfaces for periods up to 90 days. Typically used with our Stuck-O-Tape™ to provide complete protection of the window system during stucco and painting applications.

Value Film also provides surface protection for applications including fabricating, shipping and storage of glass products as well as polished, painted and mill finished metals.

- Available in blue and clear.
- Tape Thickness: 2.0 mil Adhesion: 8.3 oz/in Tensile Strength: 7 lb/in Elongation: 305%

Product Code	Size	Units/Case
Clear ✂		
589012	12" (304 mm) x 600 ft	4 / case
589021	21" (533 mm) x 600 ft	1 / case
589024	24" (609 mm) x 600 ft	1 / case
589036	36" (914 mm) x 600 ft	1 / case
589048	48" (1219 mm) x 600 ft	1 / case

Product Code	Size	Units/Case
Blue ✂		
589012B	12" (304 mm) x 600 ft	4 / case
589021B	21" (533 mm) x 600 ft	1 / case
589024B	24" (609 mm) x 600 ft	1 / case
589036B	36" (914 mm) x 600 ft	1 / case
589048B	48" (1219 mm) x 600 ft	1 / case

SURFACE PROTECTION



FloorBoard™ - 48 mil Fiber Based Floor Protection

FloorBoard™ is a heavy-duty, non-adhesive, re-useable covering for the protection of flooring during construction or the remodeling process. It rolls out quickly and easily to provide protection while also allowing new floors to cure and is safe to use on concrete, tile, wood, stone, linoleum, and vinyl. Special ingredients make this product resistant to spills, overspray and most liquids for an extended period of time. FloorBoard™ is made of 100% recycled (95% post-consumer) materials, making it environmentally friendly.

Product Code	Size	Units/Case	Pack
FLOORBOARD™	38" (965mm) x 100 ft	16 / pallet	bulk



590 Hard Surface Floor Protection Film

This 3 mil PE blue film is a low-tack temporary mask designed to protect most hardwood floors and ceramic tiles from tracked in dirt, paint spills, dust, construction debris and damage. The 590 is a reverse wound product that can be easily applied by hand or with an applicator. This product can be left in place for up to 45 days. **This product is designed for use on non-porous (hardwood / ceramic tile) flooring only.** It is the user's responsibility to determine this product's compatibility with flooring finish.

Product Code	Size	Units/Case	Pack
590124	24" (609 mm) x 200 ft	1 / case	boxed
590136	36" (914 mm) x 200 ft	1 / case	boxed
590524	24" (609 mm) x 500 ft	1 / case	boxed
590536	36" (914 mm) x 500 ft	1 / case	boxed



22 - Carpet Protection Film

A tough 3 mil PE clear film that is specifically designed for carpet protection from various types of soiling. Custom formulated adhesive system offers excellent adhesion to most types of carpeting and can be kept in place for up to 45 days. All rolls are reverse wound for easy one person application. Just begin, apply where desired and roll out like a carpet. **This product is designed for use on carpet only.**

Product Code	Size	Units/Case	Pack
59224200	24" (609 mm) x 200 ft	1 / case	boxed
59236200	36" (914 mm) x 200 ft	1 / case	boxed
59224500	24" (609 mm) x 500 ft	1 / case	boxed
59236500	36" (914 mm) x 500 ft	1 / case	boxed
59248500	48" (1219 mm) x 500 ft	1 / case	boxed

***See page 53 for Carton Seal Tape Dispenser**



Sticky-Mats

Dirt grabbing mat lifts dirt and debris from shoes and wheels, but will not leave a residue. Each mat has 30 sheets of exposed low-tack adhesive that collects and prevents foot traffic contamination. Peel top sheet away to reveal the next clean layer. Heavy duty non-skid base is available for use with 24" pads. Base prevents slipping and allows for easy relocation of entire system.

Product Code	Size	Units/Case	Pack
Sticky-Mat24B Blue	24" x 36"	4 pads / case	30 sheets / pad
Sticky-Mat24W White	24" x 36"	4 pads / case	30 sheets / pad
Sticky-Mat36W White	36" x 36"	4 pads / case	30 sheets / pad
Tmat-Base	26" x 38"	1 / case	boxed

SURFACE PROTECTION

5993 - Duct Protection Film

Tough self-adhesive PE film specifically designed to be applied at the time of fabrication over the openings of ductwork systems. Film protects uninstalled HVAC duct during storage and shipping from dirt, dust, moisture, insects and other contaminants that can lead to poor air quality. Specially formulated adhesive system will adhere to the duct during transport and will not leave residue once removed. Film is strong and puncture resistant.

Premium grade 5993 is a 3 mil blue PE film for great puncture resistance and a high tack adhesive for better hold.

Product Code	Thickness	Size	Units/Case	Pack
599324B-200	3 mil	24" (609 mm) x 200 ft	1 / case	boxed
599336B-200	3 mil	36" (914 mm) x 200 ft	1 / case	boxed



Create Instant Entries and Exits!

Stick n' Zip adhesive zippers provide the ability to create instant entry/exit from polyethylene enclosures, tarps or canvas. These self-adhering zippers can be quickly applied to create a doorway location of your choice and control the spread of dust and other contaminants on the jobsite.

A single two-pack can create a roll-up door for easy entry/exit large enough for moving equipment, ladders etc.

Why is Stick n' Zip the better choice?

- More adhesive across the width of the zipper creates a tighter seal
- High tack and repositionable during installation
- Wider temperature range than most products in the market -20°F to 150°F

Product Code	Size	Units	Pack
SZ30845	3" x 84"	2 packs	bagged

