


## 208 SERIES ABATEMENT DUCT TAPE



**Backing:** PE Coated Cloth  
**Adhesive:** Rubber  
**Liner:** N/A  
**Colors:** Teal

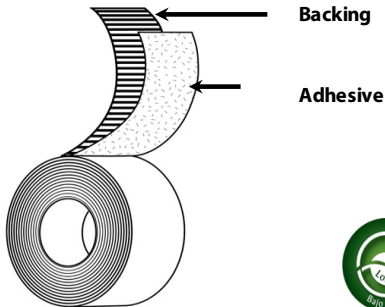

**Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- Hanging and patching polyethylene sheeting
- General repair
- Sealing polyethylene waste disposal bags
- Bundling, patching, and mending

### Features

- PE-Coated Cloth Backing
- Natural Rubber Adhesive
- Low VOC Content

### Benefits

- Excellent balance of tensile strength and tearability
- Available in a wide range of colors
- Aggressive adhesion to rough surfaces
- Superior holding power for hanging applications
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	10.5 mils	0.267 mm	ASTM D-1000
<b>Adhesion to Steel</b>	50 oz/in	5.47 N/cm	PSTC-101
<b>Tensile Strength</b>	26 lb/in	45.53 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25C): 36 months from date of manufacture.

*Physical characteristics shown are averages from tests recommended by our own procedures.  
 A particular roll may vary slightly from these averages. The buyer should determine the suitability for his own use.*