

BUILDING WRAP TAPE


826 SERIES

Sealing building wrap seams and overlaps in new construction

Exterior wall sheathing joints

Window and door flanges and frames

Patching jobsite damage caused to fragile wall sheathings such as foam and fiberboard

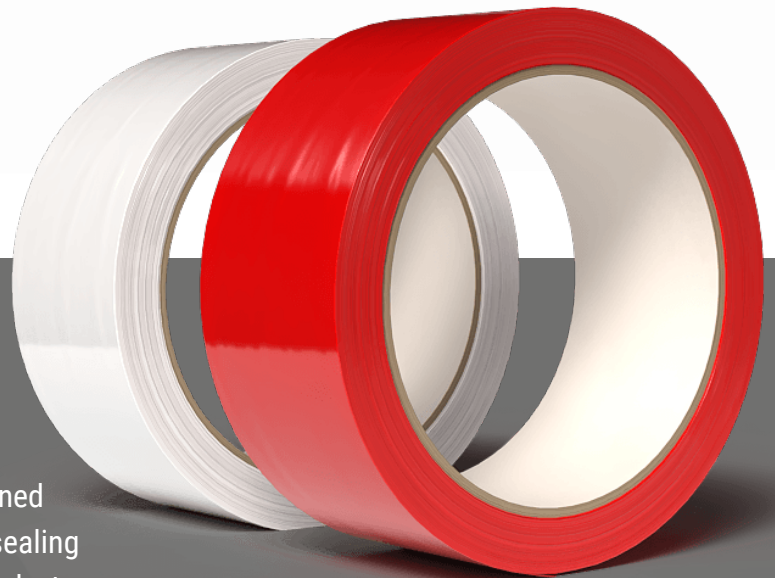

Aggressive, UV-resistant solvent acrylic pressure-sensitive adhesive combined with the conformability of UV stabilized polypropylene film provides superior sealing, protective benefits, and ease of handling that are the characteristics of a high-quality product. Designed and engineered primarily for permanent seaming and sealing of joints in foam insulation and other sheathing materials, to secure lap edges in house wraps and other vapor barriers, repair rips and tears in roll and batt insulation, construction films and membranes. Superior shear strength for sustained vertical hold. Eliminates drafts around window and door openings. Superior bonding at sub-zero (as low as -40°C) or at elevated temperatures.

ITEM	ROLL SIZE	UNITS/CASE
826202 Red	2" (48mm) x 55 yd	24/case - Bulk
826203 White	2" (48mm) x 55 yd	24/case - Bulk

Thickness: 3.0 mils

Tensile Strength: 30 lb/in

Elongation: 120%

Application Temperature: 0°F - 122°F

Service Temperature: -40°F - 212°F



CONTACT A REPRESENTATIVE TODAY

(800) 999-2218

Explore Our Catalog! Visit electrotape.com



REQUEST A CATALOG TODAY!

OR VISIT OUR ONLINE VIRTUAL CATALOG

THE PREMIUM SINGLE SOURCE TAPE PARTNER FOR INDUSTRIAL & CONSTRUCTION DISTRIBUTORS